


# UTM 1500

UTM 1500 is a mobile plant for crushing and recycling of aggregates, asphalt, rubble, and other materials, able to achieve maximum productivity, with minimum consumption.

The slow action of the grinder shafts ensures low noise pollution and low dust emissions

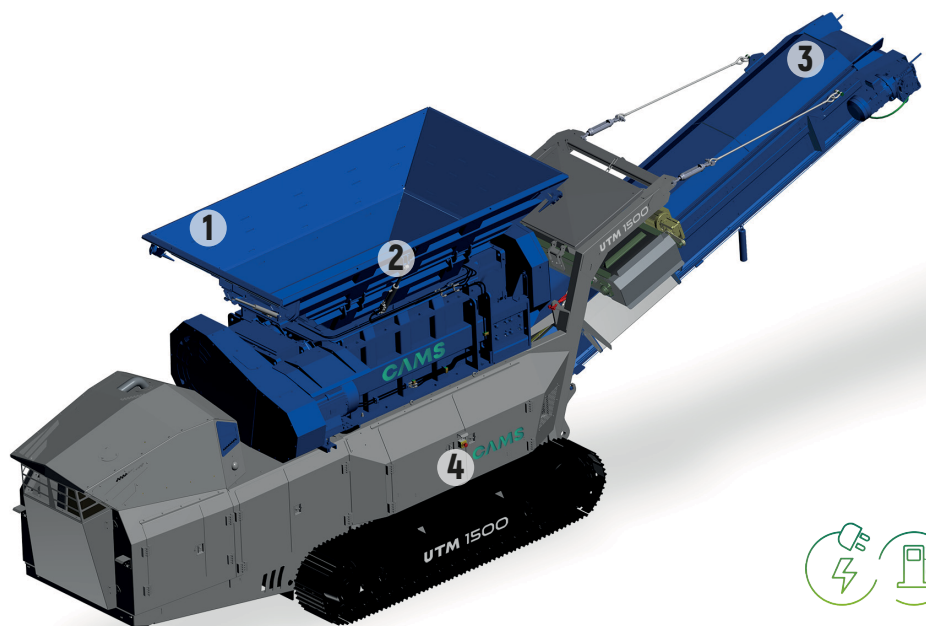

#### HYBRID DRIVE

UTM range can operate in full electric mode, reducing emissions (without diesel engine)

## FEATURES

- Automatic programs for shredding different materials
- Ability to process wet materials
- Single genset for the supply of all components
- Low fuel consumption
- Designed for compact transport dimension
- High wear resistance
- Ability to supply electrical power
- Low emissions and acoustic pollution
- Low dust emissions

## OPTIONS

- Hydraulic hopper extensions
- Hydraulic pushers
- GPS
- Belt scale
- Fuel pump
- Electrical greasing pump

### 1 Hopper

Volume: 3.80 m<sup>3</sup>  
Length: 3.50 m  
Width: 2.00 m

### 2 Shredder

Model: FTR 1500  
Surface: mm 1500 x 900

### 3 Main conveyor

Width: 800 mm  
Length: 8 m

### 4 Genset

Engine: CAT C71 Stage V 200kW  
Alternator: MeccAlte 350 kVA  
Fuel tank: 170 l

## Max. production

200 t/h

UTM 1500	
Length	10.55 m
Height	3.10 m
Width	2.50 m
Weight	22'650 kg