


UTM 1200

UTM 1200 is a mobile plant for crushing and recycling of aggregates, asphalt, rubble, and other materials, able to achieve maximum productivity, with minimum consumption.

The slow action of the grinder shafts ensures low noise pollution and low dust emissions

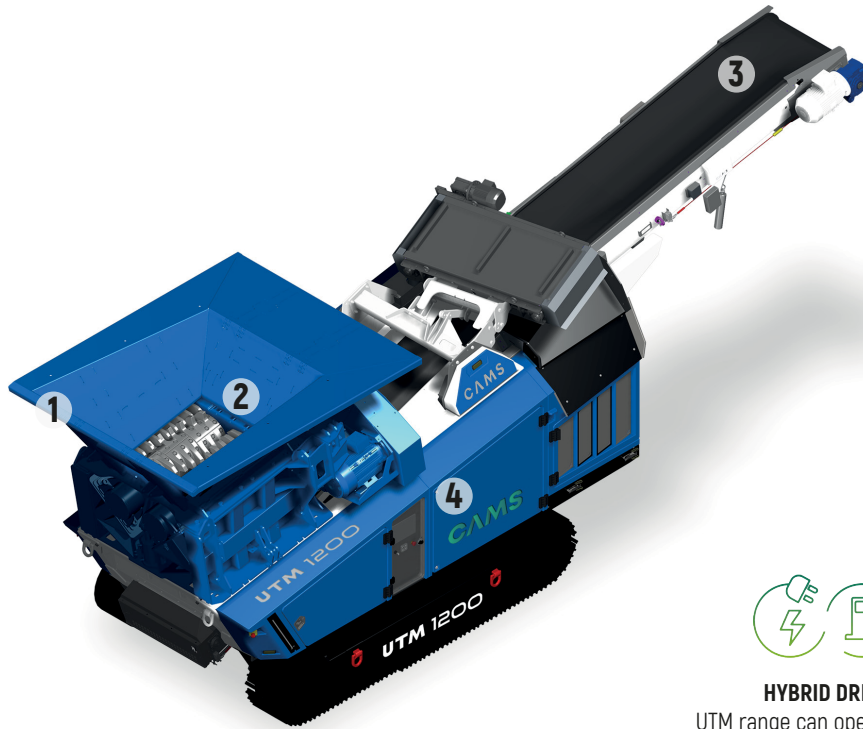

HYBRID DRIVE

UTM range can operate in full electric mode, reducing emissions (without diesel engine)

1 Hopper

Volume: 3.50 m³

Length: 3.20 m

Width: 2.00 m

2 Shredder

Model: FTR 1200

Surface: mm 1200 x 900

3 Main conveyor

Width: 800 mm

Length: 7 m

4 Genset

Engine: CAT C4.4 Stage V 125 kW

Alternator: MeccAlte 135 kVA

Fuel tank: 170 l

FEATURES

- Automatic programs for shredding different materials
- Ability to process wet materials
- Single genset for the supply of all components
- Low fuel consumption
- Designed for compact transport dimension
- High wear resistance
- Ability to supply electrical power
- Low emissions and acoustic pollution

OPTIONS

- Hydraulic hopper extensions
- Hydraulic pushers
- GPS
- Belt scale
- Fuel pump
- Electrical greasing pump

Max. production

150 t/h

UTM 1200	Transport dimensions
Length	8.70 m
Height	3.10 m
Width	2.50 m
Weight	17,500 kg